




QUALITY AT IT'S BEST..

PTCA GUIDING CATHETER



ARKA - PTCA GUIDING CATHETER

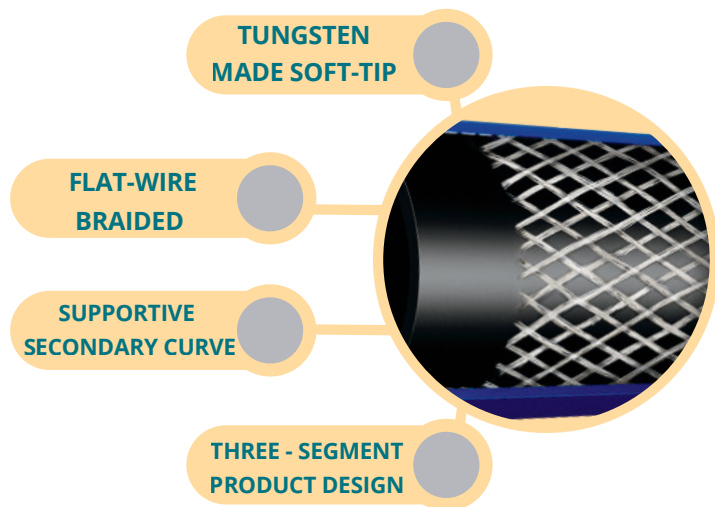

OUTSTANDING BACKUP SUPPORT:

A specialized braided polymer material delivers **KINK RESISTANCE, DURABILITY, FLEXIBILITY,** and strength. This innovative material ensures reliable performance and precise maneuvering, revolutionizing the field of materials engineering.




SOFT AND ATRAUMATIC TIP:

The tip is designed with fewer layers for the **EXTRA SOFTNESS AND SAFETY**, prioritizing a gentle touch and is on comfort, safety, for a user-friendly user safety. The focus simplicity, and practicality experience.



LARGE LUMEN DESIGN:

Incorporating a **FLAT WIRE BRAIDED** structure leads to a larger lumen, providing a smooth and flexible pathway for multiple devices. The data originates from internal lab experiments.

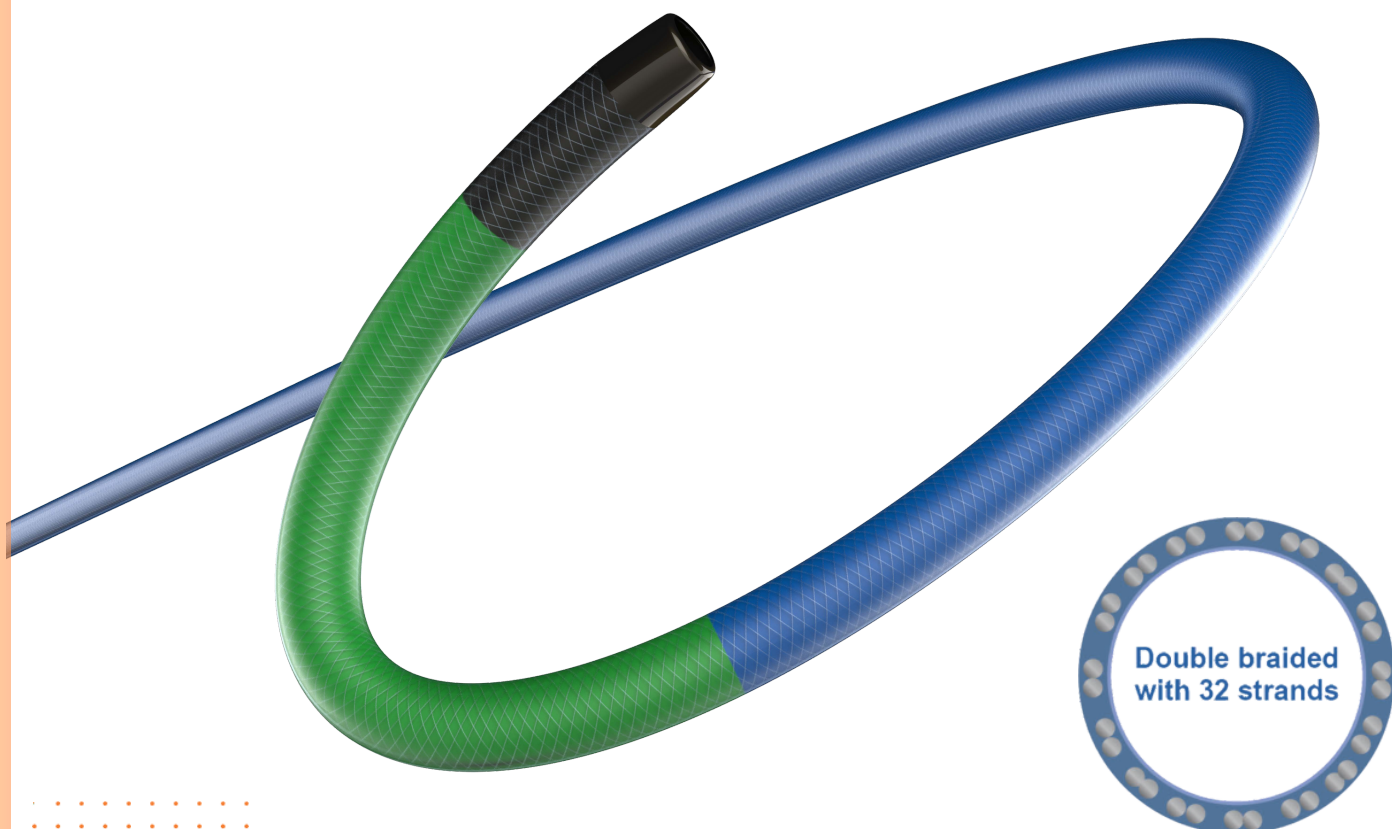


Double braiding of Pebax and stainless-steel with 32 strands ensures optimum support, pushability and steerability.

ARKA - PTCA GUIDING CATHETER


ADVANTAGES

- Pressure: 1200 PSI, holding high pressure for a more effective administration of contrast media.
- Innovative ergonomic hub - The smooth shaft and hub design improves usability and convenience.
- Large inner lumen and finely thin walls allow for smooth and quick flow of contrast media.
- we manufacture in strict compliance with international quality standards. Our catheters are finely manufactured in fully automated processes ensuring consistent production of high quality products.

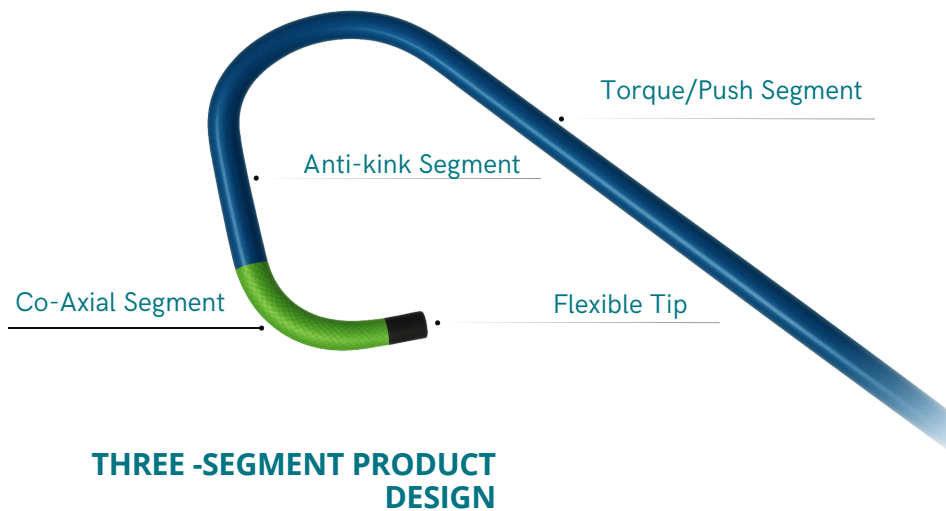

LARGEST INNER LUMEN OVER THE WHOLE RANGE.

- » Good contrast injection, also in combination with kissing balloon
- » technique. Larger lumens offer expanded device compatibility for large profile devices & enables downsizing.



ARKA - PTCA GUIDING CATHETER



	FEMORAL			RADIAL			BYPASS		
	small	normal	dilated	small	normal	dilated	TO LCA	TO RCA	TO IM
LCA									
	JL3 JL3,5 FL3 FL3,5	JL4 JL4,5 FL4 FL4,5	JL5 JL6 FL5 FL6	JL3 FL3 RBL3,5 TIG 3,5	JL3,5 JL4 FL3,5 FL4 RBL4 RAD RBM TIG 4,0 RBK	JL4,5 FL4,5 RBL4,5 RAD RBM TIG 4,5	LCB HS JR4	RCB HS JR4	IM JR4
Extra back up shapes	XB3 XB3,25 EBU3 EBU3,25 XBLAD3 XBLAD3,5	XB3,5 XB3,75 EBU3,5 EBU3,75 EBU4 XBLAD4 XBLAD4,5	XB4 XB3,725 XB4,5 EBU4,25 EBU4,5 EBU5 XBLAD5 XBLAD6	XB3 XB3,25 EBU3 EBU3,25	XB3,5 XB3,75 EBU3,5 EBU3,75 EBU4	XB4 XB3,25 XB4,5 EBU4,25 EBU4,5 EBU5			
Amplatz shapes	AL,75 AL1	AL1,5 AL2	AL3	AL2	AL3				

LCA	OTHER TAKE-OFFS	
	UP FACING	DOWNWARD FACING
	 AL1 AL2	 MP

RCA							
	JR3 JR3,5 FR3 FR3,5 SCR3,5	JR4 JR4,5 FR4 FR4,5 SCR4	JR5 JR6 FR5 FR6 SCR5	JR4 FR4 TIG 3 TIG3,5	JR4 FR4 RAD RBM TIG 4,0 HS	JR4 FR4 RAD RBM TIG 4,5 TIG5	HS AL2
Extra back up shapes	XBRCA3	XBRCA3,5 XBRCA4 HS	XBRCA4,5	RBR3	RBR3,5 RBK	RBR4	
Amplatz shapes		AL,75 AL1	AL1 AL2		AL,75 AL1		
	AR1		AR2				

Shape Selector

ORDERING INFORMATION



		5F		6F		7F			
		Curve	Ref Code	I.D.	Ref Code	I.D.	Ref Code	I.D.	
JUDKINS RIGHT	JUDKINS	JR3.0	GC5JR30	0.0578"	GC6JR30	0.0708"	GC7JR30	0.0807"	
		JR3.5	GC5JR35	0.0578"	GC6JR35	0.0708"	GC7JR35	0.0807"	
		JR4.0	GC5JR40	0.0578"	GC6JR40	0.0708"	GC7JR40	0.0807"	
		JR4.5	GC5JR45	0.0578"	GC6JR45	0.0708"	GC7JR45	0.0807"	
		JR5.0	GC5JR50	0.0578"	GC6JR50	0.0708"	GC7JR50	0.0807"	
AMPLATZ		AR1.0	GC5AR1	0.0578"	GC6AR1	0.0708"	GC7AR1	0.0807"	
		AR2.0	GC5AR2	0.0578"	GC6AR2	0.0708"	GC7AR2	0.0807"	
		AL0.75	GC5AL75	0.0578"	GC6AL75	0.0708"	GC7AL75	0.0807"	
		AL1.0	GC5AL1	0.0578"	GC6AL1	0.0708"	GC7AL1	0.0807"	
		AL1.5	GC5AL15	0.0578"	GC6AL15	0.0708"	GC7AL15	0.0807"	
		AL2.0	GC5AL2	0.0578"	GC6AL2	0.0708"	GC7AL2	0.0807"	
		AL2.5	GC5AL25	0.0578"	GC6AL25	0.0708"	GC7AL25	0.0807"	
		AL3.0	GC5AL3	0.0578"	GC6AL3	0.0708"	GC7AL3	0.0807"	
	JUDKINS LEFT		JL3.0	GC5JL30	0.0578"	GC6JL30	0.0708"	GC7JL30	0.0807"
			JL3.5	GC5JL35	0.0578"	GC6JL35	0.0708"	GC7JL35	0.0807"
JUDKINS		JL4.0	GC5JL40	0.0578"	GC6JL40	0.0708"	GC7JL40	0.0807"	
		JL4.5	GC5JL45	0.0578"	GC6JL45	0.0708"	GC7JL45	0.0807"	
		JL5.0	GC5JL50	0.0578"	GC6JL50	0.0708"	GC7JL50	0.0807"	
EXTRA BACKUP		EBU3.0	GC5EBU30	0.0578"	GC6EBU30	0.0708"	GC7EBU30	0.0807"	
		EBU3.5	GC5EBU35	0.0578"	GC6EBU35	0.0708"	GC7EBU35	0.0807"	
		EBU3.75	GC5EBU375	0.0578"	GC6EBU375	0.0708"	GC7EBU375	0.0807"	
		EBU4.0	GC5EBU40	0.0578"	GC6EBU40	0.0708"	GC7EBU40	0.0807"	
		EBU4.5	GC5EBU45	0.0578"	GC6EBU45	0.0708"	GC7EBU45	0.0807"	
		EBU5.0	GC5EBU50	0.0578"		0.0708"	GC7EBU50	0.0807"	

